



**PLAN VIEW**  
(NOT TO SCALE)

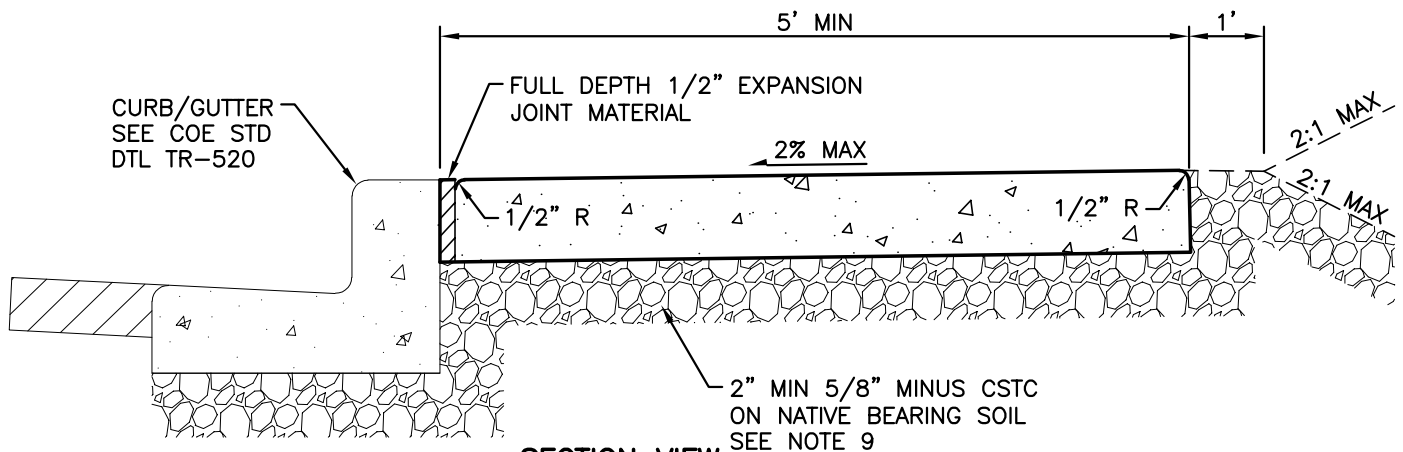

**SECTION VIEW**  
(NOT TO SCALE)

**NOTES:**

1. CITY INSPECTION REQUIRED ON FORM WORK PRIOR TO POUR.
2. CONCRETE SHALL BE CLASS 3000.
3. FINISH SHALL BE LIGHT BROOM.
4. SIDEWALK THICKNESS SHALL BE 4".
5. SIDEWALK THICKNESS AT DRIVEWAYS SHALL BE 6" THICK.
6. CURB AND GUTTER SHALL BE POURED SEPARATELY FROM SIDEWALK.
7. LIDS FOR JUNCTION BOXES AND UTILITY VAULTS SHALL BE NON-SKID AS SPECIFIED BY ENGINEER.
8. SEE COE STD DTL TR-550 FOR POSSIBLE ROOT BARRIER INSTALLATION.
9. SUBGRADE SHALL BE COMPACTED TO 95% MAXIMUM DENSITY.
10. ALL EDGES WITH EXPANSION JOINTS SHALL HAVE  $\frac{1}{2}$ " RADIUS

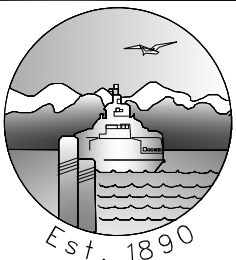

**CITY OF EDMONDS**  
PUBLIC WORKS  
DEPARTMENT

**CONCRETE SIDEWALK**

APPROVED BY: R. ENGLISH

REVISION DATE  
JUNE 2019

STANDARD  
DETAIL  
TR-531